

ORCD LEVELER

SELF ROLLING MODEL

ORCD LEVELER

The ideal tool for leveling orchard floors from side to side. The "V" Blade Leveler knocks down the high spots and fills in the low areas with a single pass.



A well prepared orchard surface will increase the speed of mechanical harvesting and minimizes the need for manual labor to collect nuts left on the orchard surface.




Nisão, Lda (TM)

Rua de Santa Ana à Lapa 5, Andar 1, Lisboa 1200-796 Portugal www.nisao.pt info@nisao.pt +351 213 420 742



The concept is straightforward. Initially, the ORCHD Leveler cuts through and gathers soil towards the center, followed by pushing the soil back outward, consistently cutting and filling. The rear smoothing plate or roller serves as a stabilizer, firming and flattening the ground. The curved reversible cutting blades effectively slice through soil, debris, and vegetation, functioning similarly to a road grader blade. The blade mounts have slots, allowing for adjustments to the cutting depth.

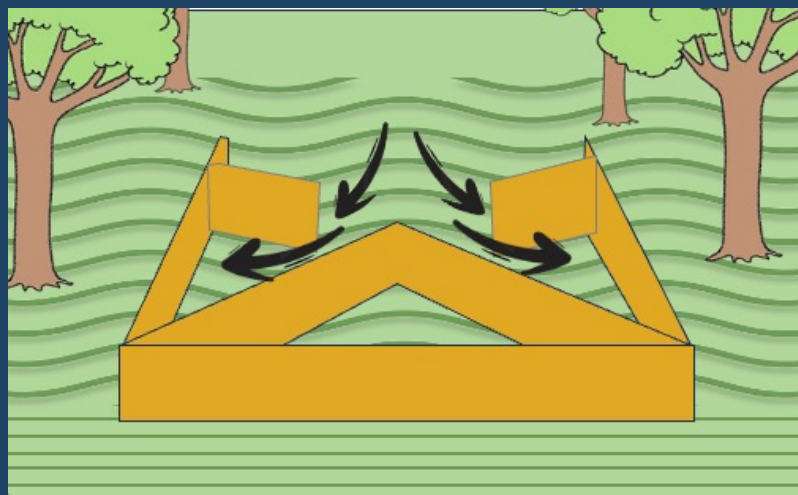

SIZING CHART

Model	Work Width	Overall Width	Overall Length	Weight	Tractor HP
OLR-24	2.4 m	2.6 m	2.6 m	700 kg	45 - 55
OLR-27	2.7 m	2.9 m	2.6 m	740 kg	50 - 60
OLR-30	3.0 m	3.2 m	2.6 m	780 kg	55 - 65
OLR-34	3.4 m	3.5 m	2.6 m	820 kg	60 - 70
OLR-37	3.7 m	3.8 m	2.6 m	865 kg	65 - 75
OLR-40	4.0 m	4.1 m	2.6 m	900 kg	70 - 80
OLR-43	4.3 m	4.4 m	2.6 m	940 kg	75 - 90
OLR-46	4.6 m	4.7 m	2.6 m	990 kg	80 - 95
OLR-49	4.9 m	5.0 m	2.6 m	1,020 kg	85 - 100
OLR-52	5.2 m	5.3 m	2.6 m	1,070 kg	90 - 105
OLR-54	5.4 m	5.6 m	2.6 m	1,100 kg	95 - 110

- Recommended Range for most walnut orchards.
- Choose according to your tree spacing, irrigation system, and tractor specifications.